
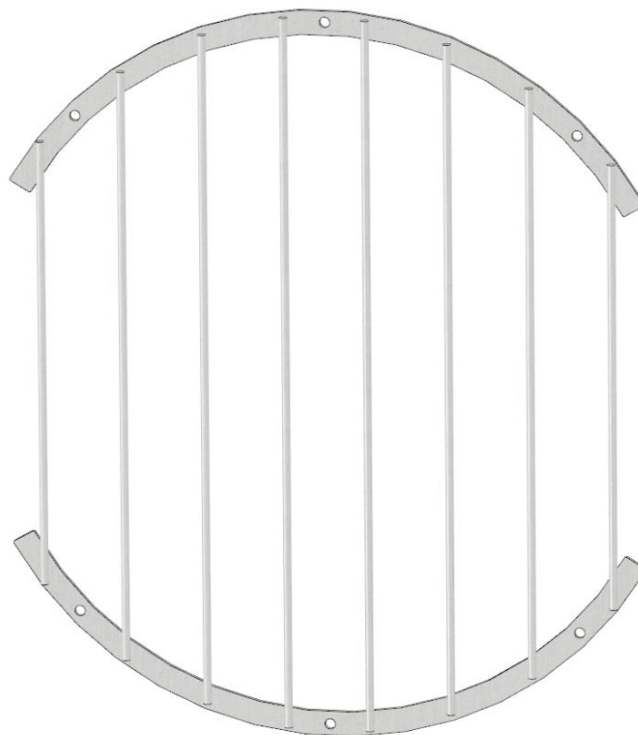


Protective Grating

VKR

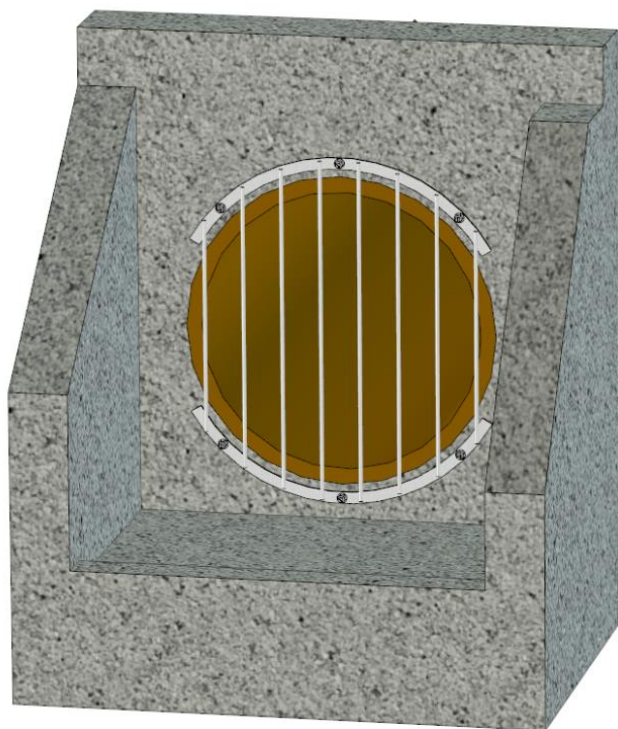

DESCRIPTION:

VKR protective gratings are used wherever it is necessary to protect the pipeline outlet against access by people and animals or protect equipment downstream from solids. Mainly used at the outlets of rainwater drainage collectors. Available in round and rectangular versions.

MATERIALS:

Welded construction made of stainless steel, e.g. AISI 304/304L - 1.4301/1.4307, acid-resistant AISI 316/316L - 1.4401/1.4404, galvanized or painted carbon steel, or any other, depending on customer requirements and mounting conditions.


MOUNTING:

Gratings mounted to the wall using adhesive or expansion anchors.

DOCUMENTATION:

Standard documentation delivered with the delivery includes: the national declaration of performance, technical and operational documentation along with the operating and assembly instructions. On request, we provide material certificates, welding documents and other according to the customer's needs.

STANDARD DIMENSIONS:

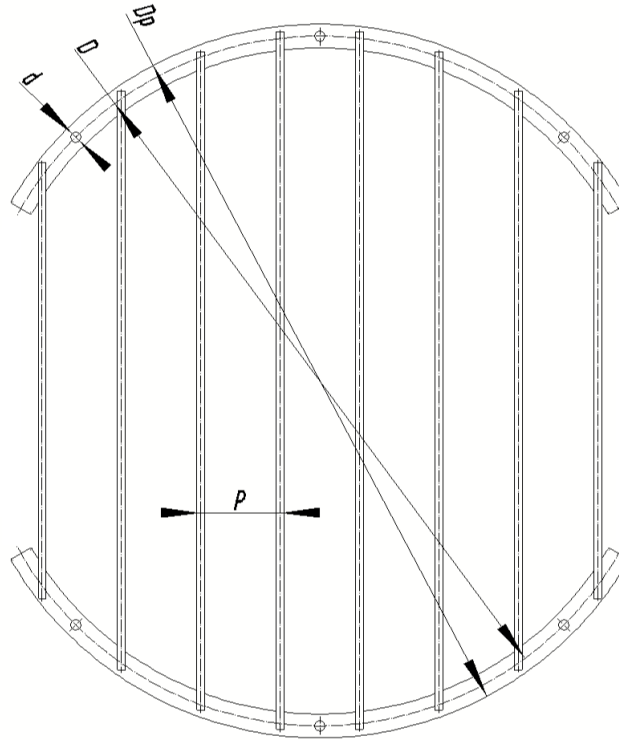

Type	External Diameter D [mm]	Pitch Circle Diameter Dp [mm]	Spacing P [mm]	Anchors Qty x Size n x d
VKR 200	300	270	150	4 x M10
VKR 250	350	320	150	4 x M10
VKR 315	415	385	150	4 x M10
VKR 400	500	460	150	4 x M10
VKR 500	600	560	150	6 x M10
VKR 600	700	660	150	6 x M10
VKR 730	830	790	150	6 x M12
VKR 800	900	860	150	6 x M12
VKR 1000	1100	1060	150	10 x M12

*Other sizes available on individual request. It is possible to make gratings of any size and bar spacing.